


# central foam system

## FI-STATION

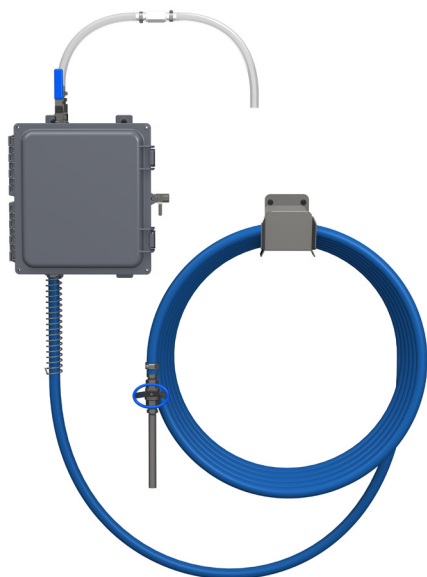

## Features

- drop station for central foam system
- pump and nozzles sold separately
- one central pump distributes pre-mixed solution through header system Powered by compressed air
- powered by compressed air
- stainless steel ball valve and wand
- stainless steel fluid fittings
- ability to add padlock to box
- includes stainless steel hose hanger

## options

- pump sold separately
- Color coding:  
Discharge hose – 4 colors (BL, GN, YL, RD)

## industries

- food and beverage
- manufacturing



how to buy

## the good stuff

- **secure central chemical location**  
keep chemistry secure, away from the production floor; no need to refill containers, chemistry given on demand,
- **no refills**  
one location to titrate consistent chemical.
- **on demand chemical**  
save time and labor, just grab the hose and foam, it's that simple.

## specifications

- power type .....central system
- chemical pickup type ..... supplied with pre-mixed solution  
from a central station
- number of products unit can draw from .....one product
- discharge line length/diameter: .....50 ft. (15 m) hose,  
with 3/4 in. (19 mm) inside diameter
- discharge wand/tip type .....7 in. (17.8 cm) stainless steel wand  
with zero tip and ball valve
- output distance.....25-30 ft. (7-9 m)
- output volume.....20-45 gal/min (75-170 l/min)
- flow rate.....2 gal/min (7.6 l/min)
- product height .....18 inches (45.7 cm)
- tubing/fitting sizes.....4 ft. (1.2 m) chemical inlet hose  
with 1/2 in. (12.7 mm) inside diameter and 1lb check valve

## requirements

- compressed air requirements.....40-80 psi (3-5 bar)  
with 5-10 cfm (141-283 l/min)
- liquid temperature range .....40-100 ° F (4.4-37 ° C)
- Central system requirements.....Pre-mixed solution  
must be supplied by a properly sized header system at 2 gpm  
and 40 to 80 psi (3 to 5 bar).
- chemical compatibility.....chemical products used with this  
equipment must be formulated for this type of application  
and compatible with unit materials and pump seals. For more  
information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service  
department.

